




Variable area flow meter short version type 123
Float in PVDF without magnet
With solvent cement sockets PVC-U metric
O-rings in EPDM

Model:

- Union nuts and valve ends in other materials on request

d (mm)	DN (mm)	Size (inch)	Type	Scale range (L/h)	Polysulfone Code	Weight (kg)	PVC-U transp. Code	Weight (kg)
16	10	3/8	SK 50	2.5 - 25.0	198 801 880	0.083	198 803 310	0.081
16	10	3/8	SK 51	5.0 - 50.0	198 801 881	0.078	198 803 311	0.079
16	10	3/8	SK 52	10.0 - 100.0	198 801 882	0.079	198 803 312	0.079
20	15	1/2	SK 60	8.0 - 80.0	198 801 883	0.125	198 803 313	0.127
20	15	1/2	SK 61	15.0 - 150.0	198 801 884	0.122	198 803 314	0.130
20	15	1/2	SK 62	20.0 - 200.0	198 801 885	0.119	198 803 315	0.125
32	25	1	SK 70	15.0 - 150.0	198 801 886	0.247	198 803 316	0.256
32	25	1	SK 71	30.0 - 300.0	198 801 887	0.244	198 803 317	0.254
32	25	1	SK 72	50.0 - 500.0	198 801 888	0.285	198 803 318	0.244
32	25	1	SK 73	100.0 - 1000.0	198 801 889	0.234	198 803 319	0.242

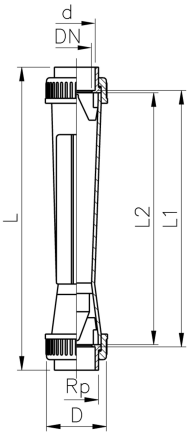

D (mm)	L (mm)	L1 (mm)	L2 (mm)	G (inch)
35	199	171	165	3/4
35	199	171	165	3/4
35	199	171	165	3/4
43	223	191	185	1
43	223	191	185	1
43	223	191	185	1
60	250	206	200	1 1/2
60	250	206	200	1 1/2
60	250	206	200	1 1/2
60	250	206	200	1 1/2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>